


Pressuremeter

Elastmeter-2 & Elast Logger-2



Elast Logger-2 ((Model-4022))

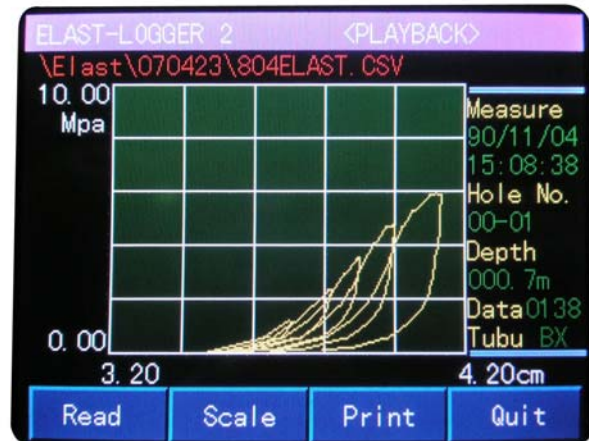


Display

<Abstract>

It is indispensable for designing the foundation for the construction of large scale structures such as buildings, dams or bridges to grasp the characteristics of deformation under a certain stress. The Elastmeter-2 is new version of lateral load tester capable of testing wide range ground from soft rock to hard rock. Highly accurate transducers and related electrical circuitry are built in the probe to improve the measurement accuracy, reliability and operability. With the two arms stretched inside the rubber packer, the system converts the displacement with the inner radius of the rubber packer into that representing the deformation with the borehole diameter.

<Features>

- Both pressure and displacement are measured directly in the probe using electrical transducers.
- Mechanical arm is used for the measurement of displacement making maintenance easier.
- Applied pressure is measured by precise semi-conductor transducer in the probe.

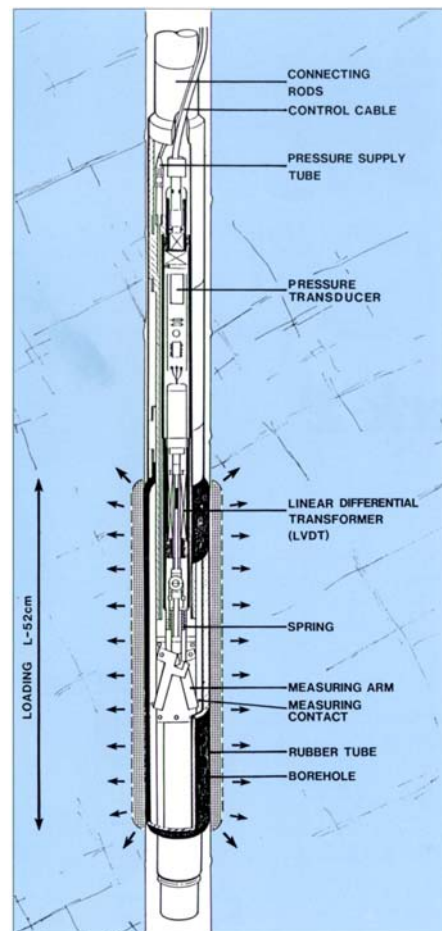

<Specifications>

Elastmeter HQ Probe (Model-4180)

Deformation detection method : Caliper arm method
(to measure the inside diameter of rubber packer)

Max. Pressurization : 20MPa

Outside diameter : 62mm

Measurement distance length : 520mm

Packers : BX, NX size

Elast Logger-2 (Model-4022)

CPU : ARM940T

Display : QVGA (320x240), 5.7inch color LCD

Pressure, displacement to be displayed in digital values and stress-strain curve

Measurement parameters : Pressure, displacement, elapsed time

Measurement interval : Pressure interval, displacement interval, time interval

Data storage : Flash ROM, USB port

Power requirement : 10.8~13.2VDC

Outer dimensions : 470(W) x 180(H) x 370(D) mm

Weight : 10kg

High pressure hand pump (Model-4185)

Pressure : Max. 20MPa

Unit exhaust quantity : 5.0cc

Tank capacity : 18 liters

Pressure gage : 20 MPa

Outer dimensions : 290(w) x 610(L) x 375(H) mm

Weight (Dry weight) : 8.0kg

High-pressure tubing (Model-4153)

Outer sheath : Neoprene rubber

Inner pipe : Nylon tube (braid reinforced)

Working pressure : 20 MPa max

Outside diameter : 8mm

Length : 100m (standard)

Control cable (Model 04181-2001)


Outer sheath : Polyurethane (black colored)

Outside diameter : 5mm (4-cored)

Length : 100m (standard)

Tensile strength : 15 N

■ Data sheet Printout

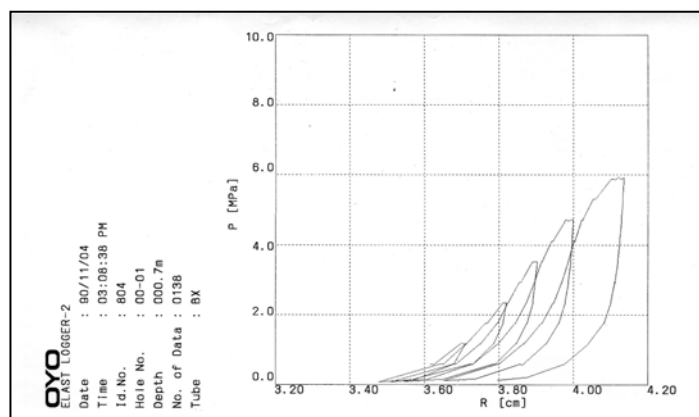

OYO
oyo corporation



JQA-2772

Please note specifications are subject to change without notice for the improvement.

• Instruments Division
43 Miyukigaoka, Tsukuba, Ibaraki, 305-0841 Japan
Phone: +81-(0)298-51-5078, Fax: +81-(0)298-51-7290
e-mail: prosight@oyonet.oyo.co.jp

• Head Office
2-6 Kudankita, 4-chome, Chiyoda-ku, Tokyo 102-0073 Japan
Phone: +81-(0)3-3234-0811, Fax: +81-(0)3-3262-5169

■ Your representative

